



PRODUCT FEATURES

- 350 lumen LED spirit level worklight
- Light-up spirit level vial & red laser pointer
- Tough ABS & aluminium construction
- Glow-in-the-dark strip around the LED
- Strong rear & side magnets
- Strong holster with belt clip
- Smart memory - remembers last mode used
- IPX4 water resistant
- High quality 3.7V 800mAh Li-ion battery
- Battery level & charging indicator
- Low battery warning flash, reminds to charge
- Fast 2A USB-C charging - 1.5H charge time
- 1m high quality USB-C charging cable included

BATTERY - 3.7V 800mAh Li-ion Rechargeable Battery

WEIGHT - 177g

DIMENSIONS - H 55 x W 90 x D 25 mm

ADVICE & IMPORTANT INFORMATION!

- Do not look directly at LEDs.
- Do not operate in direct sunlight or extreme temperature conditions (below -20°C or above 60°C).
- LEDs can become warm/hot when switched on; DO NOT touch and NEVER place face down on any surface – risk of fire! Even once the device has been switched off, DO NOT place face down as the LED/Lens will stay hot/warm for a while.
- Do not use the device if there is any visible damage.
- Do not use the device in the immediate vicinity of flammable materials or gases.
- Take care when charging, check the charging output on the charging source you are using and DO NOT exceed the stated Max charging input or damage may occur to the battery and may void the warranty.
- The rechargeable battery will reach full performance after a few complete charging and discharging cycles.
- To keep the rechargeable battery in optimum condition, it should be recharged every 3-6 months, especially if it is not being used for a long period of time.
- Always fully charge rechargeable batteries before storage and if the rechargeable battery can be removed, this is advised to avoid battery depletion and avoids the risk of a battery leaking.
- Always protect lithium batteries from heat, intense sunlight, fire, water and moisture – danger of explosion!
- If a battery is damaged, fluids can leak out. AVOID contact as this can lead to skin irritation and/or burns. If skin contact occurs, rinse thoroughly with water. If irritation persists, seek medical advice. Seek immediate medical assistance if lithium battery fluid comes into contact with the eyes.
- Children under 12 years of age should only use the product under adult supervision.
- Do not disassemble or attempt to modify the product; this will void the warranty and can be dangerous. Improper use or modification is not covered under the warranty.
- Take care not to let lenses come into contact with hard/sharp objects, damage/scratches to lenses will affect light output.
- Before cleaning the product, disconnect the charge cable. Clean with a dry or slightly moist, clean, lint-free cloth and a mild detergent if required. Do not use cleaners that contain abrasives or solvents.
- This product is water resistant to IPX4 – DO NOT SUBMERGE. If the product has been subjected to excessive moisture/water the warranty may be void.
- This product has a 1 year standard warranty (or extended to 2 years once registered online at WWW.UNILITE.CO.UK/WARRANTY) against manufacturing faults and defects. It does not cover normal wear and tear, modifications, accidental damage or poor maintenance. Unilite warranties do not cover disposable battery leaks or the use of incorrect chargers and cables that can damage rechargeable batteries.
- Do not dispose of this device in normal household waste. It must be disposed of via an authorised electrical appliance disposal centre or at your local waste disposal unit.
- Please re-use or recycle packaging responsibly.
- Keep these instructions for future reference or for subsequent possessors.

ANSI FL1 Standard



HIGH	350 Lumen	23M	1H
MEDIUM	150 Lumen	16M	2H
LOW	30 Lumen	7M	17H
VIAL LED	2 Lumen	--	25H


OPERATING INSTRUCTIONS

TOP SWITCH:- ON/OFF/MODE Switch

SWITCH SEQUENCE: Light-Up Spirit Level > High > Medium > Low > Off

Press & Hold switch to enter Red Laser Pointer Mode.

MEMORY FUNCTION:- If left ON in any mode for 5 seconds or more, the next press will turn OFF. Next press ON will return to that last mode used.

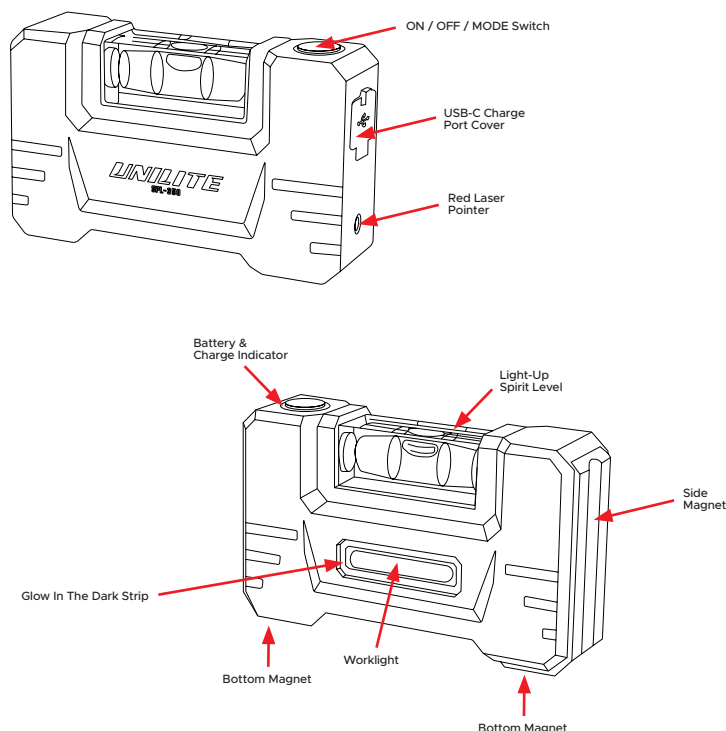

RECHARGING

- Only use a 5V USB-C cable (max 2A).
- Lift the rubber charge-port cover on the end of the flashlight and plug the USB-C end of the cable into the port.
- Plug the USB-A end of the cable into a USB charging source (do not exceed 5V 2A charging input or damage may occur).
- Circular LED around the switch will illuminate Red to confirm charging, and will turn Green once fully charged.
- Charge Time: 1.5 hours

****Warranty void if not used with the specified cables/chargers****

CHARGING INDICATOR

- Red = Charging
- Solid Green = Fully Charged

BATTERY LEVEL INDICATOR

- Green = 100% - 5%
- 3 x Green Flash = Less than 5%